

### • Description

This sensor is designed for the measurement of Sulfur Dioxide concentration in the gas phase with no sensitivity loss over time due to the humidity effect. It can be used as a replacement for the standard 7-series electrochemical Sulfur Dioxide sensors available on the market.

### • Performance Characteristics

|                                |                     |
|--------------------------------|---------------------|
| Nominal Range:                 | 0 ~ 20 ppm          |
| Maximum Overload:              | 20 ppm              |
| Sensitivity (20°C):            | 0.5 ± 0.1 µA/ppm    |
| Response Time (T90):           | ≤ 60 s              |
| Zero Signal (20°C):            | < ±0.2 µA           |
| Baseline Shift (-20°C ~ 60°C): | < 0.5 ppm           |
| Resolution:                    | 0.01 ppm            |
| Linearity:                     | Linear up to 20 ppm |
| Bias Voltage:                  | 0 mV                |

### • Environmental

|                    |                           |
|--------------------|---------------------------|
| Temperature Range: | -20°C ~ 60°C              |
| Pressure Range:    | 1 ± 0.1 atm               |
| Humidity Range:    | 5% ~ 95%RH non-condensing |

### • Life Time

|                           |                                |
|---------------------------|--------------------------------|
| Long Time Output Drift:   | < 2% signal/month              |
| Recommended Storage Temp: | 10°C ~ 30°C                    |
| Expected Operating Life:  | 2 years in clean air           |
| Storage Life:             | 6 months in original packaging |
| Warranty:                 | 12 months                      |

### • Intrinsic Safety Data

|   |          |
|---|----------|
| Max. Current at 20ppm SO <sub>2</sub> : | < 0.2 mA |
| Max. O/C Voltage:                       | 1.3 V    |
| Max. S/C Current:                       | < 1.0 A  |


### • Physical Characteristics

|                   |     |
|-------------------|-----|
| Housing Material: | ABS |
| Weight (Nominal): | 8 g |
| RoHS Compliance   |     |

### • Installation

Output signals from the sensor pins are different. Inappropriate use of the pins in product design will affect the sensor functionality. Exposure to high concentrations of solvent vapors should be avoided under any condition. Mechanical overstress may cause deformation or cracks of the plastic enclosure of the sensor. If the sensor is used in extreme environmental conditions, please contact us for more details.

### • Product Dimensions

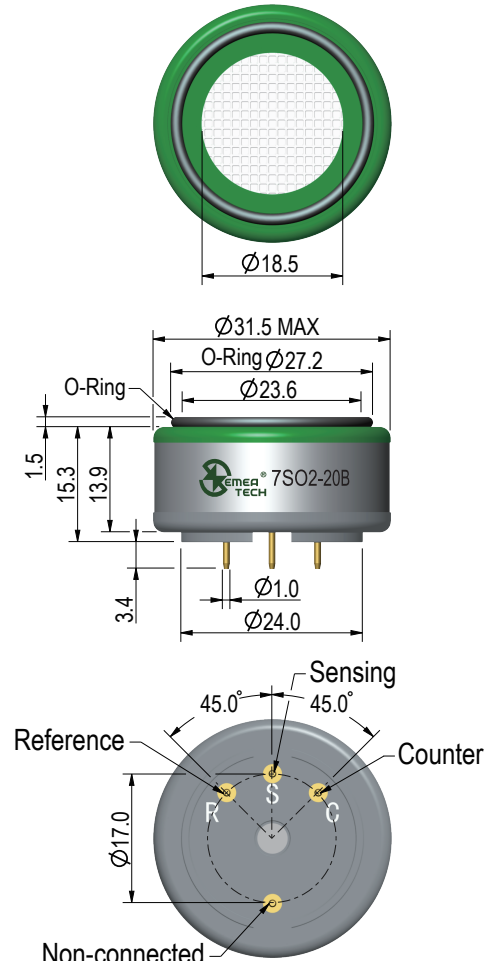

All dimensions in mm

All tolerances ±0.20mm unless otherwise stated

### • Note


The performance data in this document are conducted by using SemeaTech recommended test circuitry and test environment at 20°C, 50%RH and 1 atm. Sensor performance varies under different environmental conditions. Please contact us if you need more details.

### • Cross-Sensitivity Data

| Gas              | Concentration (ppm) | Output Signal (ppm SO <sub>2</sub> equivalent) |
|------------------|---------------------|--|
| Carbon Monoxide  | 100                 | -0.3   |
| Hydrogen Sulfide | 25                  | 22.0   |
| Nitric Oxide     | 50                  | 0.0  |
| Nitrogen Dioxide | 10                  | -5.0   |
| Ammonia          | 20                  | 0.4  |
| Hydrogen         | 1,000               | 0.0  |
| Ethylene         | 50                  | 0.0  |
| Chlorine         | 20                  | -12.0  |
| Acetylene        | 10                  | 0.0  |
| Ethanol          | 2,000               | 0.0  |

Note: The cross sensitivities include but not limited to the above gases. It may also respond to other gases. The data in the table above may vary from different batches of sensors and the changes of test environment. Calibration using the gases that have the cross sensitivities to this sensor is not recommended.

### • Temperature Data

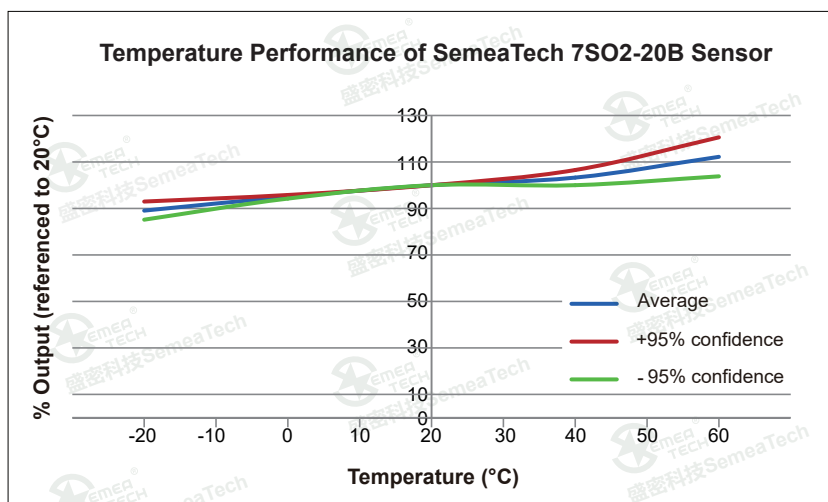

### • Safety Note

This sensor is designed to be used in certain instruments for life critical applications. To ensure the sensor functions per its specifications inside the instrument, it is required to read the instrument user's guide carefully and comply with the calibration procedures by using certified target calibration gas before each use. Failure to do so may cause serious injury and fatality. Please do not open the sensor plastic enclosure because the electrolyte and other chemicals stored inside are harmful.

It is highly recommended for customers to validate the sensor performance using this document as a reference for their product designs or applications.

This product data sheet is used for reference only.

SemeaTech is committed to providing its customers the most accurate data based on its best knowledge. SemeaTech does not provide a product warranty for failures of using its products in accordance with product specifications that are described in the datasheet, or other misuses, abuse, negligence to the product.