

• Description

This sensor is designed for the measurement of Oxygen concentration in gas phase. It can be used as a pin-to-pin replacement for the standard 4-series electrochemical Oxygen sensors made by other manufacturers.

• Performance Characteristics

Nominal Range:	0 ~ 25% vol oxygen
Maximum Overload:	30% vol oxygen
Output Signal (20°C):	-100 ± 20 µA in air
Response Time (T ₉₀):	≤ 15 s
Zero Signal (20°C):	±0.5% vol oxygen
Resolution:	0.1% vol oxygen
Linearity:	$S = K \log_e(1/1-C)$
Bias Voltage:	-600 mV
RSD:	< 1%

• Environmental

Temperature Range:	-40°C ~ 50°C
Pressure Range:	1 ± 0.1 atm
Humidity Range:	15% ~ 90%RH non-condensing

• Life Time

Long Time Output Drift:	< 5% signal/year
Recommended Storage Temp:	10°C ~ 30°C
Expected Operating Life:	5 years in clean air
Storage Life:	12 months in original packaging
Warranty:	36 months


• Physical Characteristics

Housing Material:	ABS
Weight (Nominal):	5 g
RoHS Compliance:	Yes

• Installation

Output signals from the sensor pins are different. Inappropriate use of the pins in product design will affect the sensor functionality. Exposure to high concentrations of solvent vapors should be avoided under any condition. Mechanical overstress may cause deformation or cracks of the plastic enclosure of the sensor. If the sensor is used in extreme environmental conditions, please contact us for more details.

• Product Dimensions

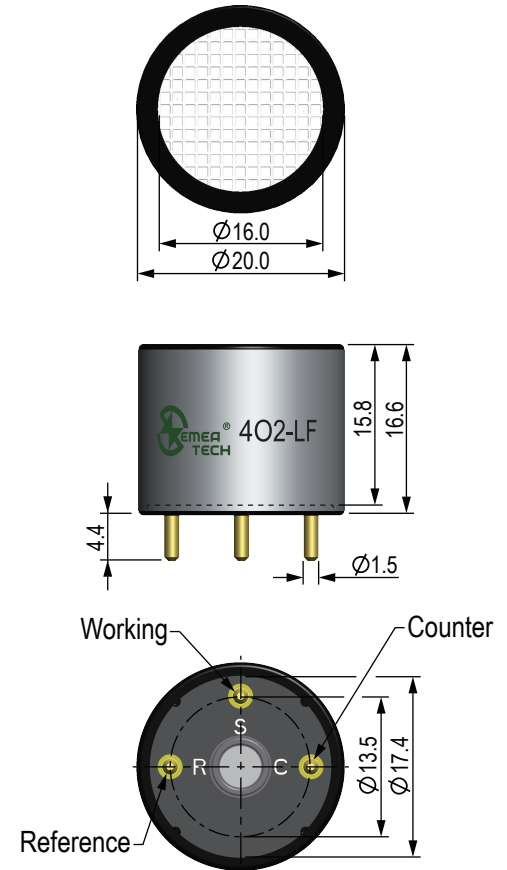

All dimensions in mm

All tolerances ±0.20mm unless otherwise stated

• Note

The performance data in this document are conducted by using SemeaTech recommended test circuitry and test environment at 20°C, 50%RH and 1 atm. Sensor performance varies under different environmental conditions. Please contact us if you need more details.




ELECTROCHEMICAL O2-LF SENSOR (4 SERIES) (PN: 053-0000-000)

- **Cross-Sensitivity Data**

Note: The cross-sensitivities include but are not limited to the above gases. It may also respond to other gases. The data in the table above may vary from different batches of sensors and the changes of the test environment. Calibration using the gases that have the cross-sensitivity to this sensor is not recommended.

- **Temperature Data**

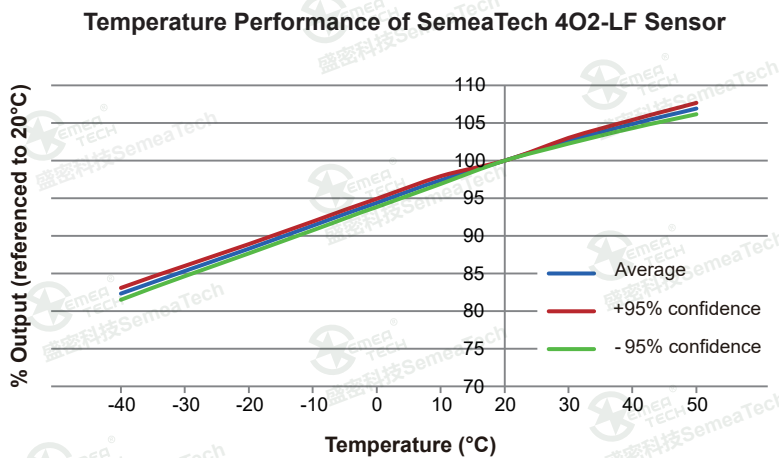

- **Safety Note**

It is highly recommended for customers to validate the sensor performance using this document as a reference for their product designs or applications.

SemeaTech is committed to providing its customers the most accurate data based on its best knowledge. SemeaTech does not provide a product warranty for failures of using its products in accordance with product specifications that are described in the datasheet, or other misuses, abuse, negligence to the product.